

6 Ports Full Gigabit Managed Industrial POE Switch **DES-42S2MG-IND**



Elevate Your Connectivity With
Our Latest Network Switches



DATASHEET

DES-22S2MG-IND

6 Ports Full GigabitManaged Industrial POE Switch

- ☆ Managed 4*10/100/1000M POE + 2*1000M SFP ber Ports Industrial PoE Switch,1- 4 ports support IEEE POE 802.3AF/AT;
- ☆ Standard POE power is 15.4W/port, maximum power: 30W/port;
- ☆ PoE default: 1, 2(+)/3, 6(-), alternative: 4, 5(+)/7, 8(-);
- ☆ Switching capacity: 12Gbps, MAC table: 8K;
- ☆ Support L2+ full network management, PoE network management and conguration;
- ☆ Input voltage: DC48- 57V, Redundant dual power 4- bit industrial terminals;
- ☆ IP protection level: IP40; Rail- type installation;

Introduction;

The DES- 22S2MG-IND is a full Gigabit managed industrial POE switch independently developed by it has 4*10/100/1000M POE ports and 2*100/1000M uplink SFP ber slot ports. port 1 Dasscom- 4 can support IEEE 802.3AF/AT standard POE power supply, maximum power 30W/port . As a POE power supply device, it can automatically detect and identify the electrical equipment that meets the standard and supply power through the cable. It can supply the POE terminal equipment, such as wireless AP, network camera, network telephone, industrial sensor and so on, to meet the demand for high density PoE power supply network environment. It is suitable for intelligent transportation, rail transportation, electric power industry, metallurgy and green energy construction and so on. A reliable communication networks. The managed model supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms). When a one- way network fails, communication can be quickly resumed to ensure uninterrupted communication of important applications. DES- 22S2MG-IND industrial series products fully comply with industrial product design and materials. The shell is made of aluminum alloy to enhance heat dissipation performance and IP40 protection level to ensure stable operation of equipment under harsh environment. You can congure PoE power management, port tra c control, VLAN division, STP, and RSTP for multiple application services based on the Web, CLI, and SNMP network management

DATASHEET

Technical Specifications;

Model	DES-42S2MG-IND
Interface	4*10/100/1000Base-T PoE ports (Data/Power) 2*100/1000M uplink SFP fiber slot ports (Data) 1 * RS232 console port (115200, N,8,1) 2 sets of V+, V- redundant DC power interface (5 Pin Phoenix terminal)
PoE Port	Port 1-4 can support IEEE802.3af/at POE standard
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x
PoE Standard	IEEE802.3af/at
PoE Power per port	Sufficient to operate the CCTV Camera connected
Ethernet Port Feature	10/100/1000BaseT (X) automatic detection, full / half duplex MDI/MDI-X adaptive
SFP Port Characteristic	Gigabit SFP optical fiber interface, default matching optical modules, need to buy separately, (optional order mode / multi-mode, single fiber / double fiber optical module.
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	12Gbps (Non-blocking)
Forwarding Rate	8.93Mpps
MAC	8K
Buffer Memory	4M
Jumbo Frame	10K
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤ 100 meter) 100BASE-TX: Cat5 or later UTP (≤ 100 meter) 1000BASE-T: Cat5e or later UTP (≤ 100 meter)
Optical Cable	Multimode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Power Supply Pin	1/2 (+), 3/6 (-) 4-core power supply
Working Voltage	DC power supply, DC48-57V ultra-wide supply voltage, 5P Phoenix terminal connection, support anti-reverse protection
Max Power Per Port	30W/15.4W
Total PWR / Input Voltage	250W (48-57VDC)
Power Consumption	Standby:<8W; Full load:<250W
LED Indicator	PWR (green); system indicator's SYS (green); Network Indicator: Link/Act (yellow); SFP Indicator: L/A (green); PoE Indicator: PoE (green)
Power Supply	No, see accessories information table to buy and use

DATASHEET

Technical Specifications;

Model	DES-42S2MG-IND
Operation TEMP / Humidity	-40~+80°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+85°C;5%~95% RH Non condensing
Dimension	165*120*52MM
Net /Gross Weight	<0.7kg /<1.5kg
Lightning protection / protection level	<p>Lightning protection: 6KV 8/20us; Protection level: IP40</p> <p>IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge</p> <p>IEC61000-4-3(RS):10V/m(80~1000MHz)</p> <p>IEC61000-4-4(EFT): power cable: ±4kV; data cable: ±2kV</p> <p>IEC61000-4-5(Surge): power cable:CM±4kV/DM±2kV; data cable: ±4kV</p> <p>IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)</p> <p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m,1s to 3s</p> <p>IEC61000-4-9(pulsed magnetic field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV, DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022): Class B</p> <p>IEC61000-6-2(Common Industrial Standard)</p>
Mechanical Properties	<p>IEC60068-2-6 (anti vibration)</p> <p>IEC60068-2-27 (anti shock)</p> <p>IEC60068-2-32 (free fall)</p>
Certification	CCC; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;
Business features (only restricted management function models)	
Port	<p>Support IEEE802.3x flow control (full duplex)</p> <p>Support for broadcast storm suppression based on port rate</p> <p>support speed limit for incoming and offline message traffic, with a minimum particle size of 64Kbps.</p> <p>Support port temperature protection settings</p> <p>Support port IEEE green Ethernet energy saving configuration</p>
PoE Management	<p>Support total power limit configuration for POE power supply</p> <p>Support PoE output power allocation per port, close / start af/at</p> <p>Support PoE output priority configuration per port</p> <p>Support PoE work status per port display</p> <p>Support power delay start</p> <p>Support PoE work and time scheduling</p>
Layer 3 Function	<p>L2+ network management function</p> <p>Support IPV4/IPV6 management</p> <p>Support layer3 soft routing (weak three ether) forwarding,</p> <p>Support different network segments, communication between different VLAN</p> <p>Support static routing / default routing 128, 1024 ARP software forwarding</p>
VLAN	<p>Support port based VLAN (4K), IEEE802.1q</p> <p>Support protocol based VLAN</p>

DATASHEET

Technical Specifications;

Model	DES-42S2MG-IND
	Support Voice VLAN Support for MAC address-based VLANs Support Access, Trunk, Hybrid three types of port configuration Support QinQ configuration
Port Aggregation	Support LACP Support static polymerization Support the largest 8 aggregation groups, each aggregation group supports 8 ports.
Spanning Tree	Support STP (IEEE802.1d) Support STPRSTP (IEEE802.1w) Support STP MSTP (IEEE802.1s)
Industrial Ring Network Protocol	Support G.8032 (ERPS), support 255 loops at most, and supports 1024 devices per ring. The self-healing time of the ring network is less than 20ms
Multicast	Support IGMP Snooping V1/V2 and support 1024 multicast groups at most. Support the user's quick departure mechanism Support MLD Snooping V1/V2 Support multicast VLAN
Mirror	Bi-directional traffic mirroring supporting the basic port
QoS	Support Diff-Serv QoS Each port supports 8 output queues Support 802.1p/DSCP priority mapping Support queue scheduling mechanism (SP, WRR, SP+WRR) Support priority tag Mark/Remark Support stream-based packet filtering Support for stream-based redirec on Support flow-based speed limit
ACL	Support L2 to L4 packet filtering function, can match the first 80 bytes of the message, provide based on the source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN and other definition on ACL. Support ACL based on port and VLAN
Safety Characteristics	Support user grading management and password protection Support IEEE802.1X authentication / centralized MAC address authentication Support AAA&RADIUS authentication Support the number of MAC address learning restrictions Support MAC address black hole Support SSH 2.0 to provide secure passwords for user login. Support SSL to ensure data transmission security Support port isolation Support the speed limit function of ARP message Support IP source address protection


DATASHEET

Technical Specifications;

Model	DES-42S2MG-IND
	Support ARP intrusion detection function Support against DoS attacks Support port broadcast message suppression Support host data backup mechanism Binding capabilities of IP+MAC+VLAN+ ports
Remote Management	Shall support remote management through SNMP traps
DHCP	Support DHCP Client Support DHCP Snooping Support DHCP Serve Support DHCP Relay
Management and Maintenance	Support Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration Support WEB network management (HTTPS) Support FTP, TFTP, Xmodem, SFTP file download management Support SNMP V1/V2C/V3 Support one bond reduction Support NTP clock Support system work log Support Ping detection Support cable state detection Support CPU instant utilization status view Support link layer discovery protocol LLDP System Requirements Support NMS intelligent management center
System Requirements	Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later; Cat5e or later Ethernet cable; TCP/ IP, network adapter and network operating system (Microsoft Windows, Linux or Mac OS X) installed on every computer in the network.

DATASHEET

DIMENSIONS:

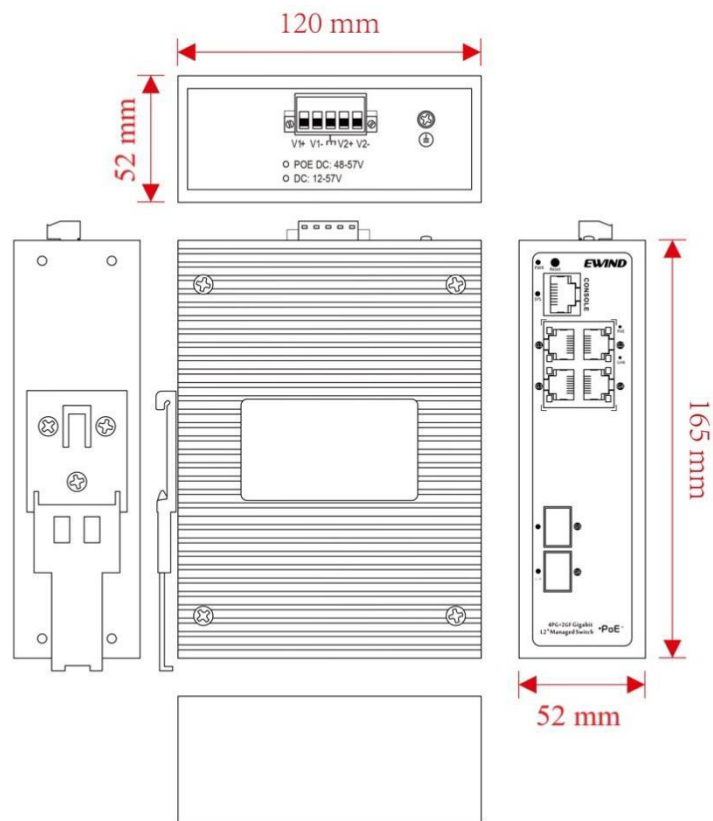

APPLICATIONS:



PACKING LIST

CONTENT	QTY	UNIT
6- port 95W Port Giga managed industrial PoE switch (DES- 42S2MG- IND)	1	SET
Console Cable	1	PCs
User Guide	1	PCs
Warranty Card	1	PCs